



# HB40 - 44 J

## Exceptional productivity

- Fully proportional controls and simultaneous boom functions
- 360° continuous turntable rotation

## Outstanding rough terrain driving features

- Hydraulic differential lock
- 4 wheel drive
- 14 in ground clearance

**34 ft 10 in (HB40) and 40 ft 5 in (HB44 J) outreach provides a large working envelope**



**Haulotte**   
GROUP

More than lifting



# HB40 / HB44 J


## ROUGH TERRAIN TELESCOPIC BOOMS

### TECHNICAL DATA

#### HB40

#### HB44 J

Working height	46 ft	50 ft
Platform height	40 ft	44 ft
Horizontal outreach	34 ft 10 in	40 ft 5 in
Lift capacity	500 lbs	500 lbs
<b>F x G</b> Platform size	7 ft 6 in x 2 ft 7 in	5 ft 11 in x 2 ft 7 in
<b>A</b> Length	24 ft 11 in	27 ft 11 in
<b>H</b> Length - storage	24 ft 11 in	22 ft 1 in
<b>B</b> Overall width	7 ft 6 in	7 ft 6 in
<b>C</b> Height - stowed	7 ft 6 in	7 ft 6 in
<b>J</b> Height - storage	7 ft 3 in	8 ft 2 in
Vertical jib rotation	N/A	140° (+70/-70)
Platform rotation	178° (+89/-89)	178° (+89/-89)
Boom rotation angle	+75°/-13°	+75°/-13°
Turntable rotation	360° continuous	360° continuous
Tailswing	34 in	34 in
<b>D</b> Wheelbase	6 ft 7 in	6 ft 7 in
<b>E</b> Ground clearance	14 in	14 in
Tilt alarm	5°	5°
Drive speed	0.43 - 3.4 mph	0.43 - 3.4 mph
Gradeability	50 %	50 %
Turning radius - outside	14 ft 3 in	14 ft 3 in
Tires	14-17.5	14-17.5
Engine	28 kW - 38 hp	28 kW - 38 hp
Weight	13,010 lbs	14,994 lbs


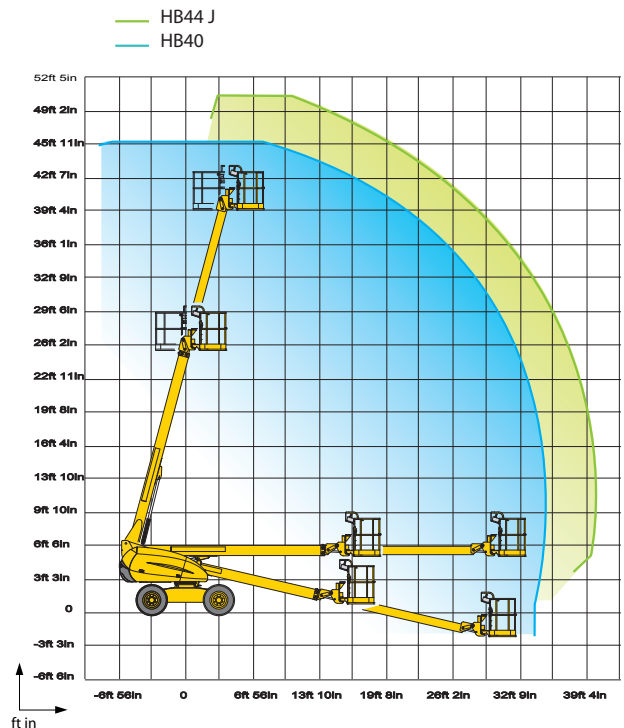


### STANDARD EQUIPMENT

- 4 Wheel drive, 2 wheel steer
- Foam filled rough terrain tires
- Rotating engine tray for easy maintenance
- Swing lockpin for transport
- Tow hooks
- Hour meter
- 8 ft platform (on HB40 only)
- AC power to the platform
- Automatic platform leveling
- Fully proportional controls
- Electronic horn
- Lanyard attachment points

### OPTIONS AND ACCESSORIES

- HB44 J: 8 ft platform (440lbs)
- Cold weather package
- Flashing beacon
- Motion alarm (travel and elevate)
- Air line to platform
- 70 W working light
- 4.1 kW on-board generator
- Cold Weather Package
- Specific oil for hot countries

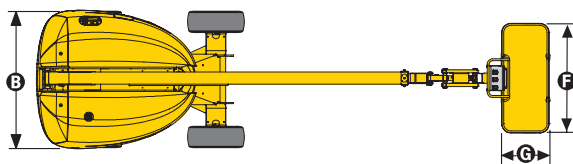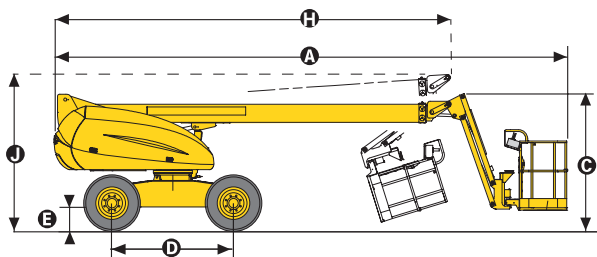

2420604500 - We reserve the right to modify the technical characteristics of this document without notice - 01/2016